

Delta Series® Perforated Louvre

Louvreclad Delta Series® is a high-strength perforated steel louvre providing security and ventilation, ideal for high-traffic or impact-prone areas. It is highly impact-resistant, and suitable for smoke exhaust.

Features

PERFORMANCE

High Strength & Ventilation

Good ventilation and versatile rain defence. Heat tested to maintain structural integrity for 2 hours at 300°C. Tested to withstand impacts up to 140kg, ideal for high-traffic areas.

AESTHETICS

Robust Design

Roll-formed perforated steel louvres with zero vision screening. Available in Colorbond®, Zincalume®, and Unicote® finishes, suitable for horizontal or vertical installation.

DESIGN

Versatile Application

Offered as single-stage or two-stage louvres, with options for solid cladding. Engineered for blade spans up to 2400mm and lengths up to 7200mm, ensuring security and durability.

Specifications

AUSTRALIAN STANDARDS

Performance tested to
AS/NZS 4740:2000

ORIENTATION

Horizontal, Vertical, Can be
intervened for zero vision
screening

MATERIAL

Zincalume® or single-sided
Colorbond® high tensile steel

FINISH


Colorbond® Steel, Colorbond®
Ultra & Metallic, and the
Zincalume® standard range

ACCESSORIES

Insect mesh, Blanking sheets,
Dust filters, Security screens
and bars, Integrated louvred
doors, Dampers

INSTALLATION



Installation and mounting
details will be designed in
accordance with proprietary
systems and recommendations
as designed and manufactured
by Louvreclad.



Explore the profile options

Delta Series®

High-strength perforated steel single stage louvres

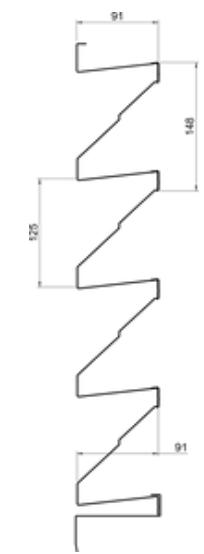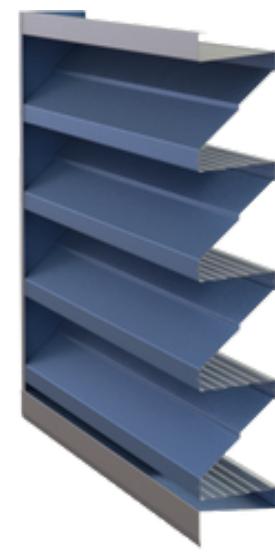

Class 2
AERODYNAMICS

Class D
RAIN RESISTANCE

94 mm
DEPTH

12kg/m2
WEIGHT

0.602 CD
DISCHARGE COEFFICIENT

75 %
EFFECTIVE RAIN RESISTANCE

125 mm
PITCH

Horizontal, Vertical
ORIENTATION



0.22 m2
EFFECTIVE AERODYNAMIC AREA

48 %
FREE OPEN AREA

2000 mm
MAX SPAN

Delta Series® Vertical

High-strength perforated steel single stage louvres

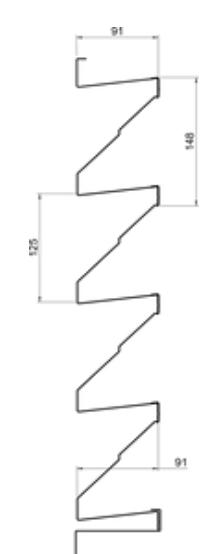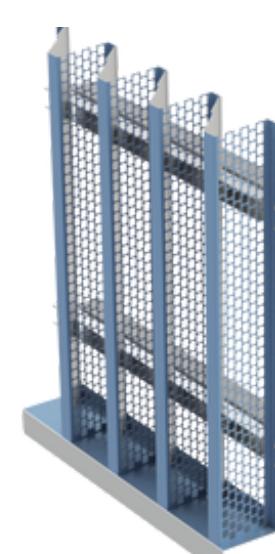

Class 2
AERODYNAMICS

Class D
RAIN RESISTANCE

94 mm
DEPTH

12kg/m2
WEIGHT

0.602 CD
DISCHARGE COEFFICIENT

75 %
EFFECTIVE RAIN RESISTANCE

125 mm
PITCH

Vertical
ORIENTATION


0.22 m2
EFFECTIVE AERODYNAMIC AREA

48 %
FREE OPEN AREA

2000 mm
MAX SPAN

Delta Series® Blanked

High-strength steel acoustic rated louvres

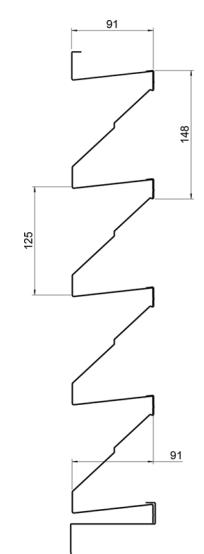

25 Rw
RW ACOUSTIC RATING

0 %
FREE OPEN AREA

125
PITCH

0.0 CD
DISCHARGE COEFFICIENT

94 mm
DEPTH

2000 mm
MAX SPAN

0.0 m2
EFFECTIVE AERODYNAMIC AREA



0.5 mm Colorbond
THICKNESS

12kg/m2
WEIGHT

Horizontal, Vertical
ORIENTATION

Delta Series® Two-Stage

High-strength perforated steel two-stage louvres

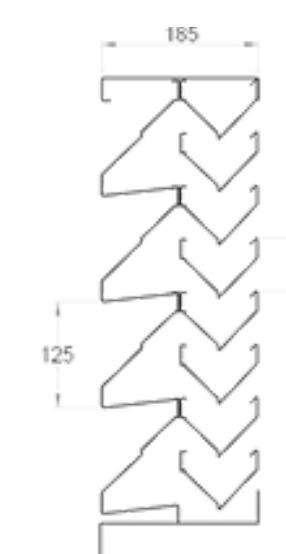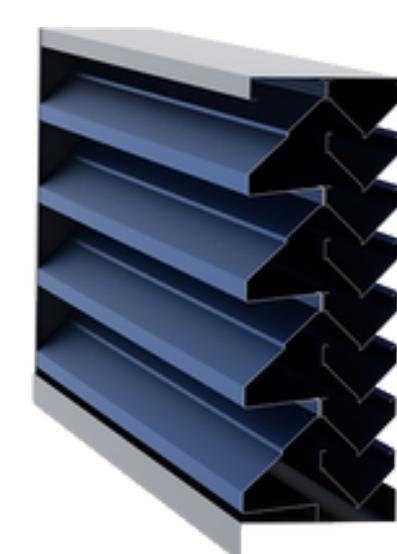

Class 3
AERODYNAMICS

Class A
RAIN RESISTANCE

188 mm
DEPTH

35kg/m2
WEIGHT

0.391 CD
DISCHARGE COEFFICIENT

100 %
EFFECTIVE RAIN RESISTANCE


125 mm
PITCH

Horizontal
ORIENTATION

0.14 m2
EFFECTIVE AERODYNAMIC AREA

42 %
FREE OPEN AREA

2000 mm
MAX SPAN



Made to Perform

1300 165 678

sales@louvreclad.com

louvreclad.com

AS 4740 Rain Resistance

Delta Series®

Rain penetration classification at each core velocity.

Ventilator Core Velocity (m/2)	0	0.5	1	1.5	2	2.5	3	3.5
Effectiveness E (%)	83%	81%	79%	76%	75%	74%	69%	61%
Classification	Class C	Class C	Class C	Class D				

The results concluded that the ventilator has low rain resistance performance at the core velocity from 0-3.5m/s summarised in the table above. The average rain penetration effectiveness for this model was 75% under Class D rating.

Delta Series® Two Stage

Ventilator Core Velocity (m/2)	0	0.5	1	1.5	2	2.5	3	3.5
Effectiveness E (%)	100%	100%	100%	100%	100%	100%	100%	100%
Classification	Class A							


The results concluded the ventilator has excellent rain resistance performance at the core velocities from 0-3.5m/s summarised in the table above. The average rain penetration effectiveness for this model was 100% in Class A rating.

Technical Data Disclaimer

- Indicative maximum span provided are based on generic permissible design wind pressure of 2kPa.
- Span values and product technical information provided are subjected to variance by project specific requirements & influence factors such as building location, terrain category & local pressure effects.
- Span values provided are based on typical scenario where product specified are fixed at one end; simply supported at the other end and in either horizontal or vertical orientation.
- If the product specified is required to function as barrier for fall protection or as trafficable element, maximum span and pitch nominated may be reduced.
- Span values provided could be influenced and reduced when used in dynamically sensitive wind environment.


For project specific product selection or preliminary design & engineering consultation, please contact 1300 165 678 or sales@louvreclad.com to arrange or book a meeting.



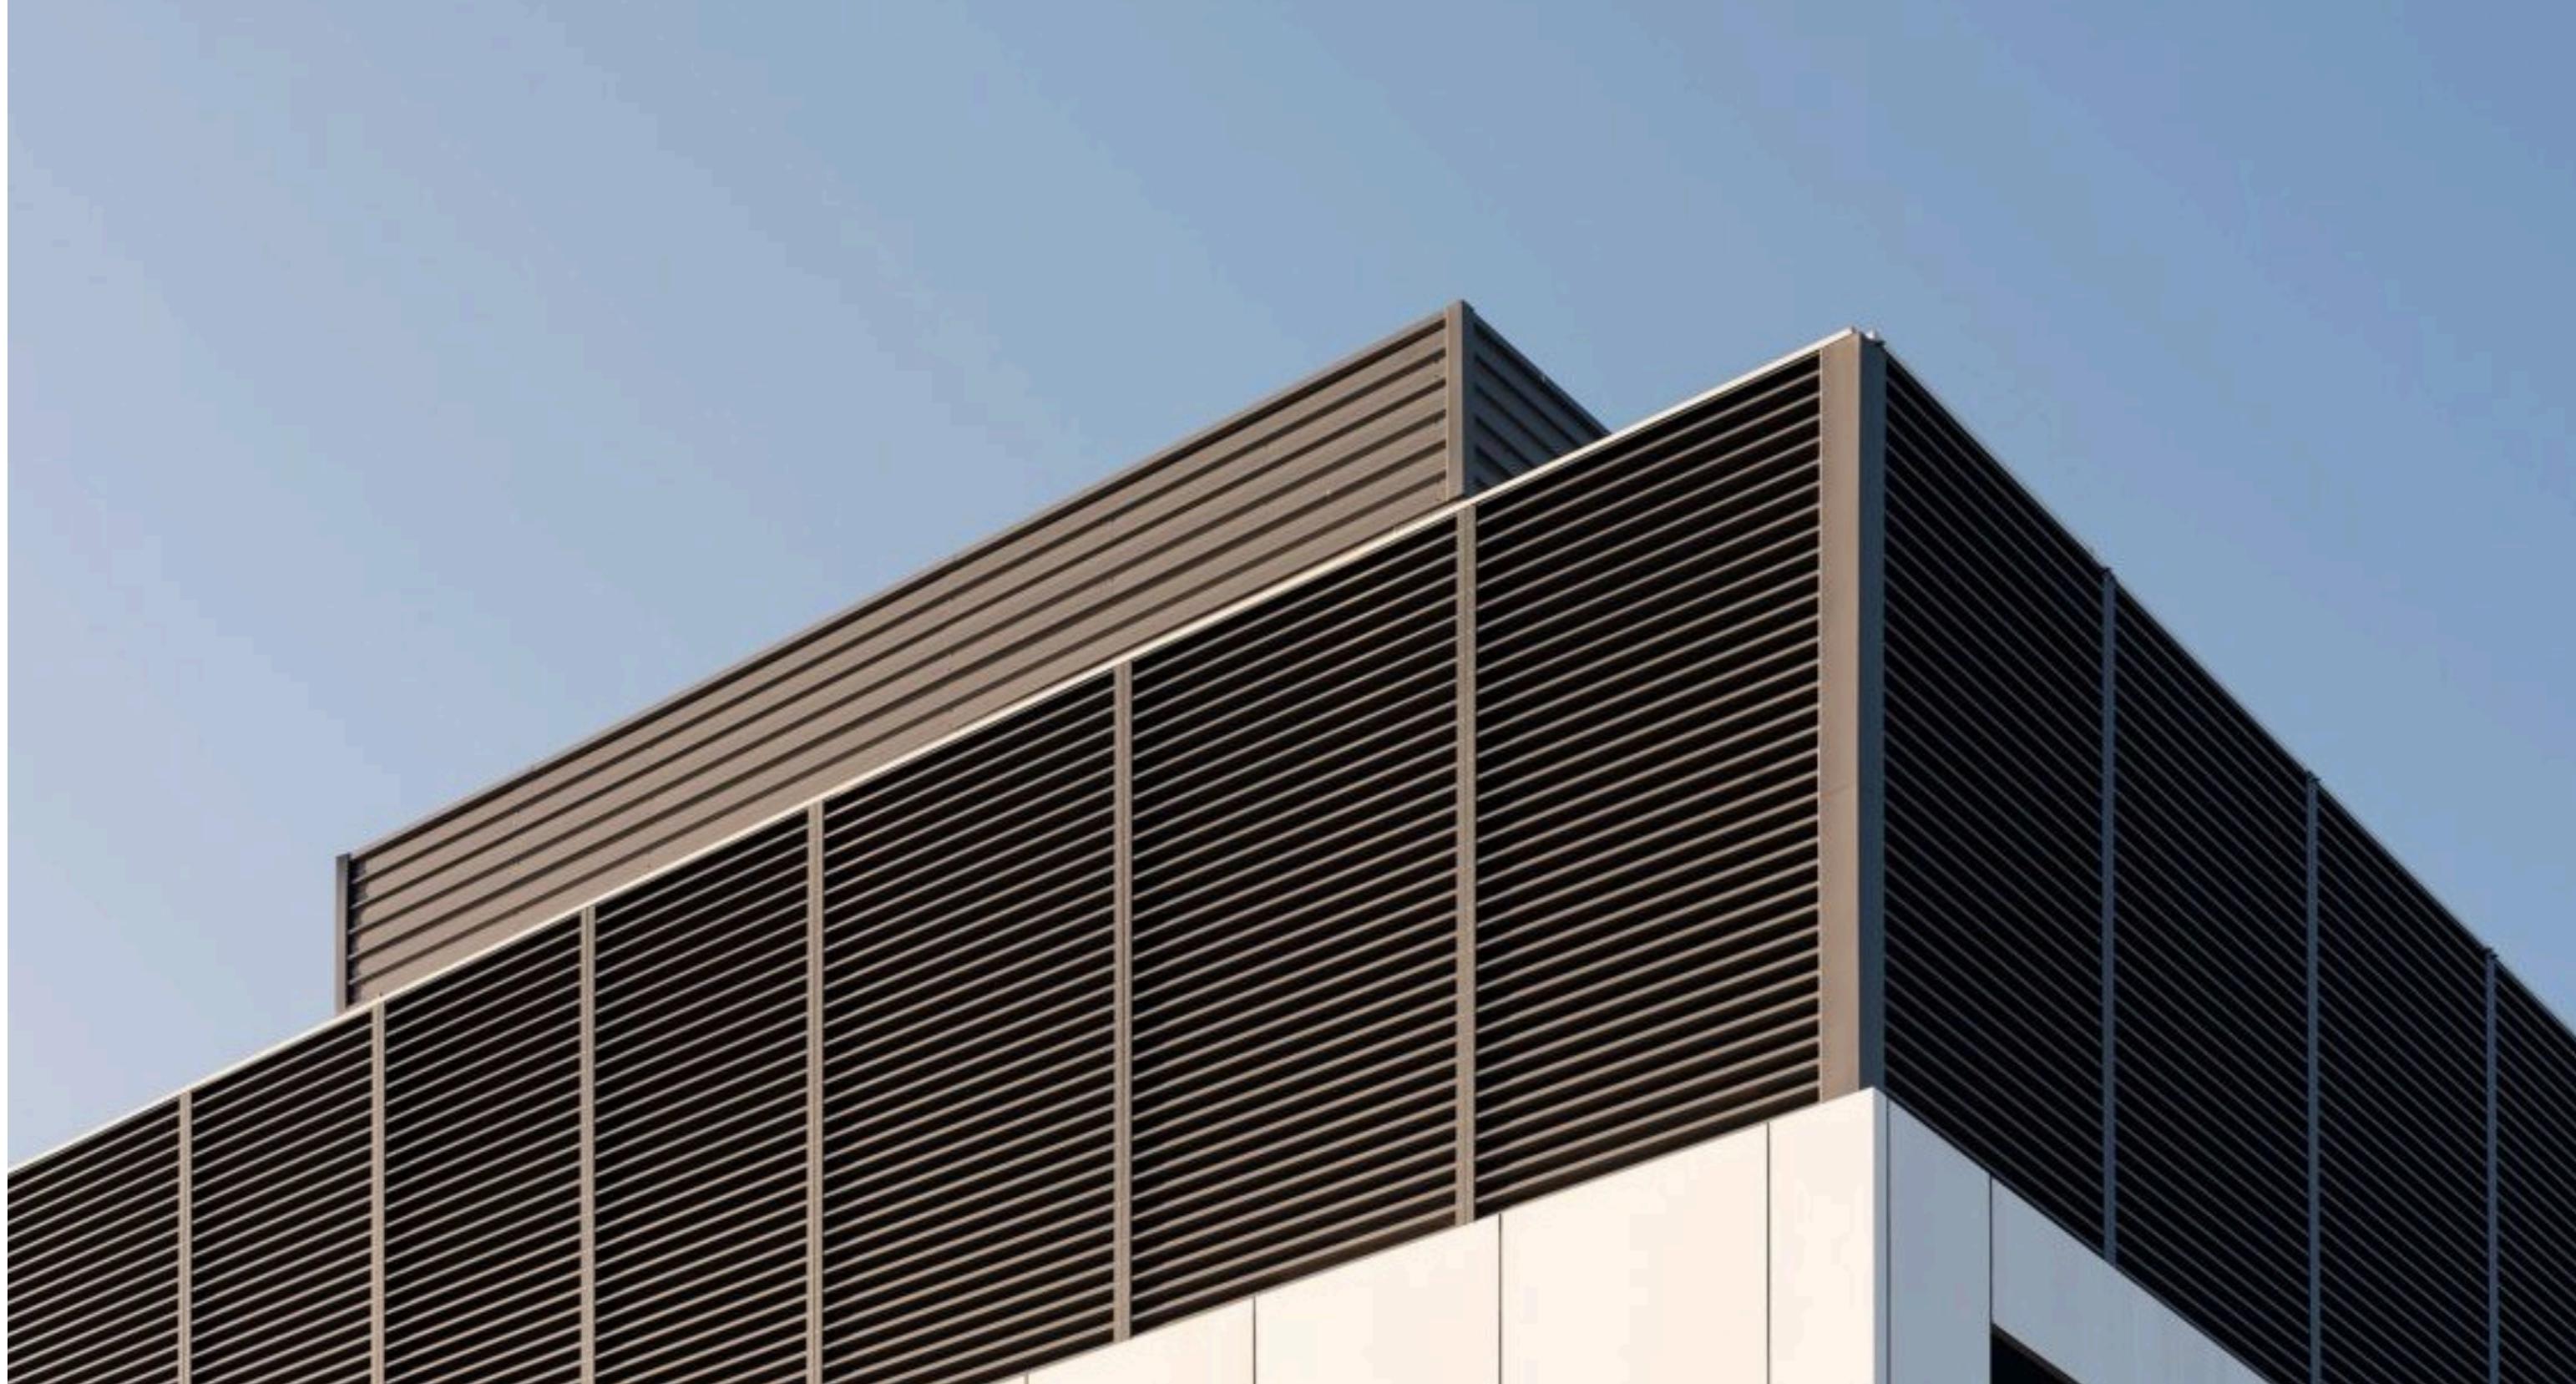

Inspire with Quality

As leaders in the building envelope market, we are known for exceptional quality and lasting value. Our credibility, wealth of knowledge, and unmatched competence enable us to inspire exterior solutions that look good and perform better.

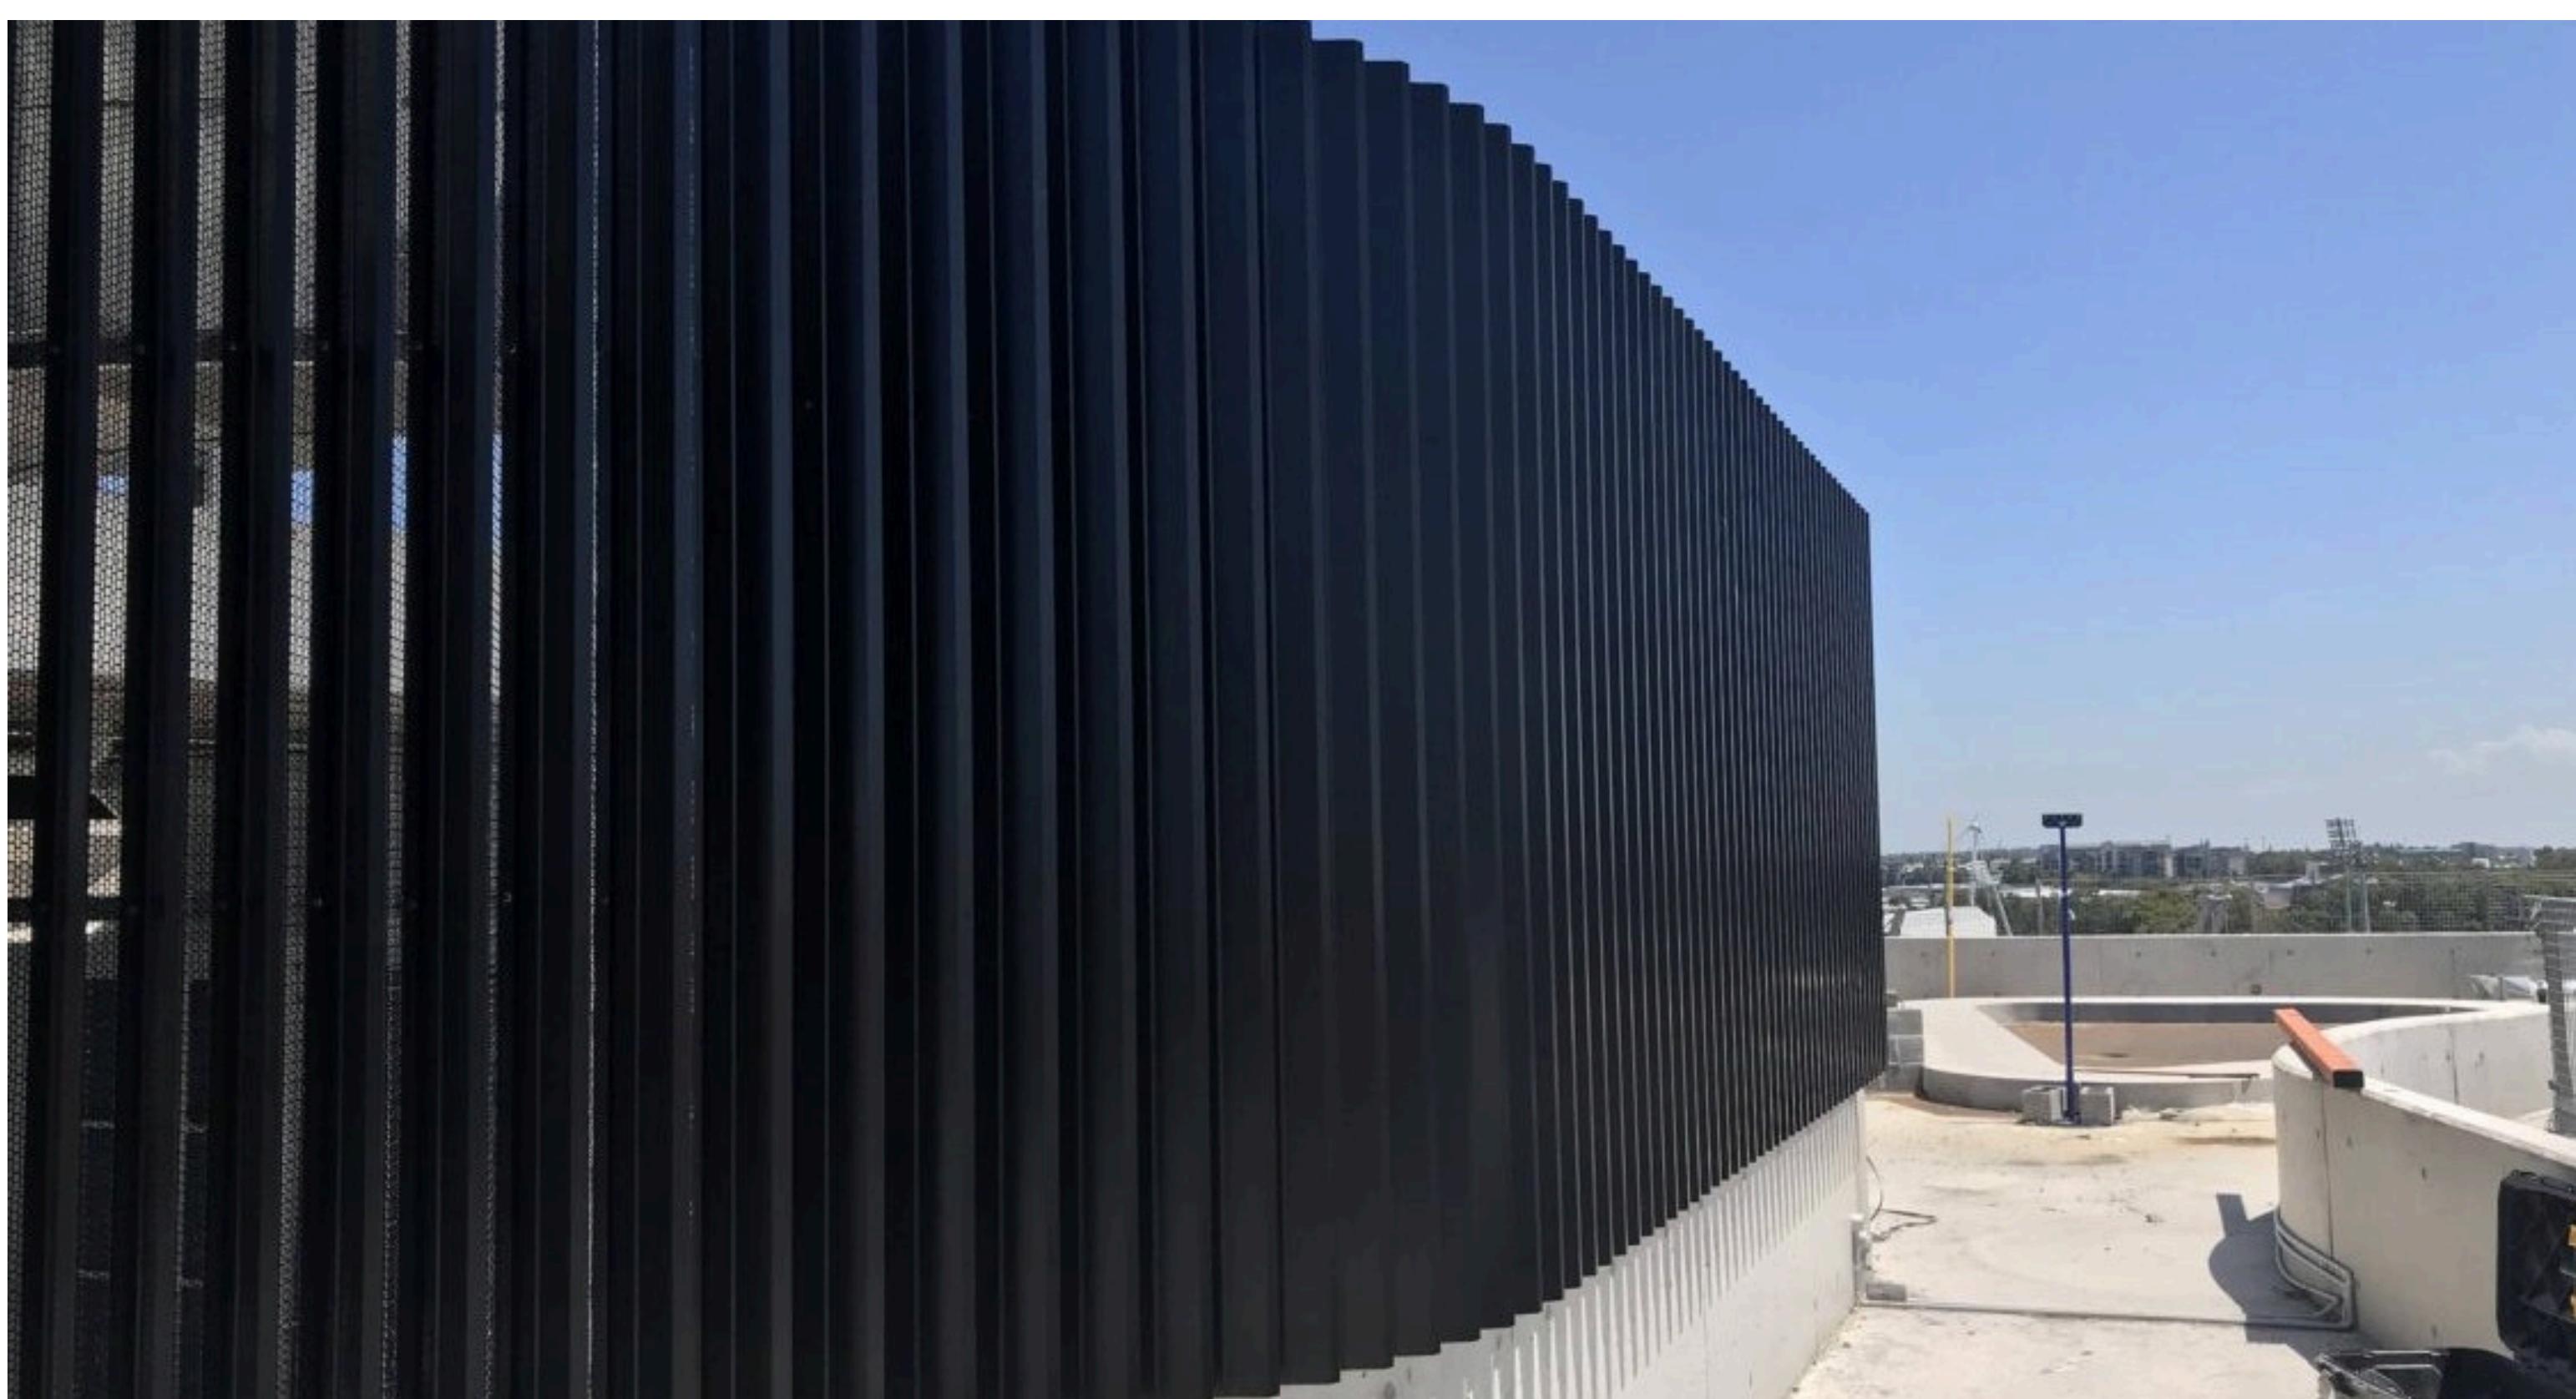

The MadeRight Guarantee

Following our proven process enables us to develop solutions we're proud to put our mark of quality to. We guarantee that all projects will be delivered in a timely manner, be on specification, engineered to Australian standards and finished to the highest quality.




Made to Perform

Louvreclad solutions are made to last and manufactured on-site using high-quality Australian aluminium and steel. As an organisation we are driven to get a thousand things right everyday to achieve our vision to be the face of Australian Building.

Our facades are not here to be average, they are here to perform – and so are we.

Speak to an expert

Reach out today to discuss your facade solution requirements; we would love to hear from you.



Made to Perform

1300 165 678

sales@louvreclad.com

louvreclad.com